

全自动床垫复合贴棉滚喷一体机



AI 拍摄及检测由AI完成
Smartview SVS


性能 Character	型号 Model	LR-TA-PE
生产效率		600张/天
Production capacity		600 pieces / day
涂胶方式		喷胶和滚胶
Gluing method		Glue spraying and Glue rolling
喷胶头/Glue spray head		6个/ unit
辊胶温度/Roll glue temperature		140-160°C
控制原理		总线控制
Working principle		Servo control
气源需求/Air consumption		0.1m³/min
工作气压/Air pressure		0.6-0.7 mpa
总功率/Power consumption in total		70KW
输入电源需求	电压/Voltage	3AC 380V
	频率/Frequency	50/60HZ
Power requirements	输入电流/Input current	110A
	输入电缆/Cable section	3*35mm²+2*16mm²
工作温度/Working temperature		+5°C~+35°C
重量/Weight		约/Approx.10000Kg

耗材参数/Consumption Materl Data	
热熔胶	Hot melt adhesive
喷胶 (Glue spraying)	EVA
滚胶 (Glue rolling)	PUR / APA0

床垫尺寸/ Mattress Size	
床垫厚度/ Mattress thickness	50~350mm
床垫长度/ Mattress length	1900-2100mm
床垫宽度/ Mattress width	900-2100mm
海绵密度/ Foam density	20-70KG/m³
海绵形状/ Foam shape	平面型/波浪型 Flat type / wave type

滚胶、喷胶一体化设备
两种模式均可节约30-40%以上的胶水用量
更可实现材料自动对位, 无需人工干预

Intigrated machine for glue rolling and spraying
Both modes can save more than 30~40% of glue consumption
Available for automatic material alignment

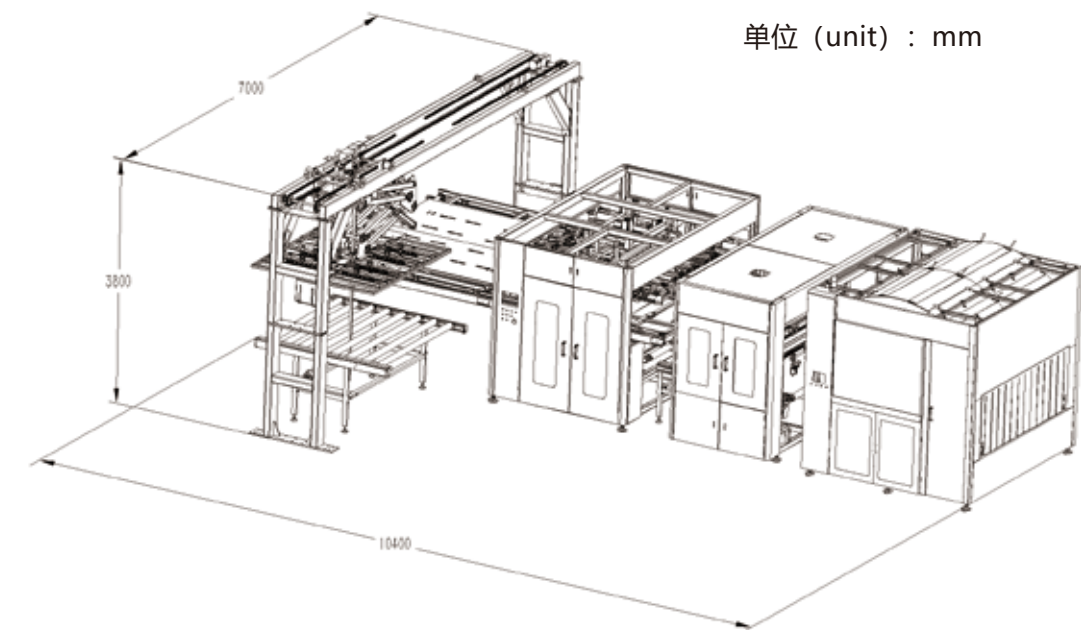

- 滚胶, 喷胶复合一体化生产
Compound integrated production of glue rolling and glue spraying
- 物料自动影像识别, AI智能抓取
automatic image recognition of materials
AI intelligent capture
- 斑马条形滚胶方式, 有效节约用胶量
The zebra type of glue rolling
saving glue consumption